



SET-UP & DELIVERY GUIDELINES



SET-UP & DELIVERY GUIDELINES

Getting Ready For Delivery & Set-up Of Your New Spa

Surface And Pad Requirements

- Your new portable spa must be placed on a uniformly firm, flat, and level surface. A concrete pad 4 inches thick is best.
- If your spa is located near sprinklers, adjust or cap them so as not to hit the siding of the spa.

Balconies And Deck Requirements

- Decking must be constructed to support 85 pounds per square foot.
- Balconies must be constructed to meet current state and local codes.
- Gates must be self closing and self-latching.

Access & Clearance


- Your spa requires up to 40" of clearance through gates between house and side fences, and up to 8.5' overhead clearance depending on the size of the unit.
- The clearance required to turn a corner can be equal to the length of the spa.
- All debris blocking access to the job site, must be removed prior to delivery. Any trimming of trees or bushes, removal of debris, leveling of ground or other general maintenance must be done prior to delivery and is the responsibility of the customer.

Electrical Requirements

- Your 110 Volt spa pack requires an isolated (no other appliances or lights on this circuit at any time) 110 Volt, 20 amp circuit breaker cords maximum length 15 ft.
- Your 220 Volt spa pack will require a 50 amp dedicated GFCI circuit breaker, depending on model.

Wiring Requirements

- 4 Wire #8 Gauge wire **under** 50 ft
2-Hots, 1-Neutral, 1-Isolated Ground
- 4 Wire #6 Gauge wire **over** 50 ft.
2-Hots, 1-Neutral, 1-Isolated Ground

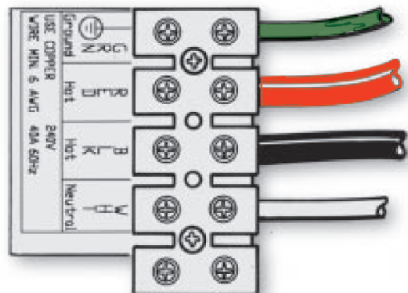

SET-UP & DELIVERY GUIDELINES

Getting Ready For Delivery & Set-up Of Your New Spa


Wiring Requirements (Cont.)

- Extension Cords are not to be used in conjunction with operation of the spa. Low voltage damage could result, which is not covered by warranty.
- If you have any doubts, have your electrical system checked by a qualified electrician.

It is the customers responsibility to acquire necessary permits, to arrange for installation and hook up of the electrical power.

WIRING DIAGRAM

Factory Recommended G.F.C.I Load Center Wiring

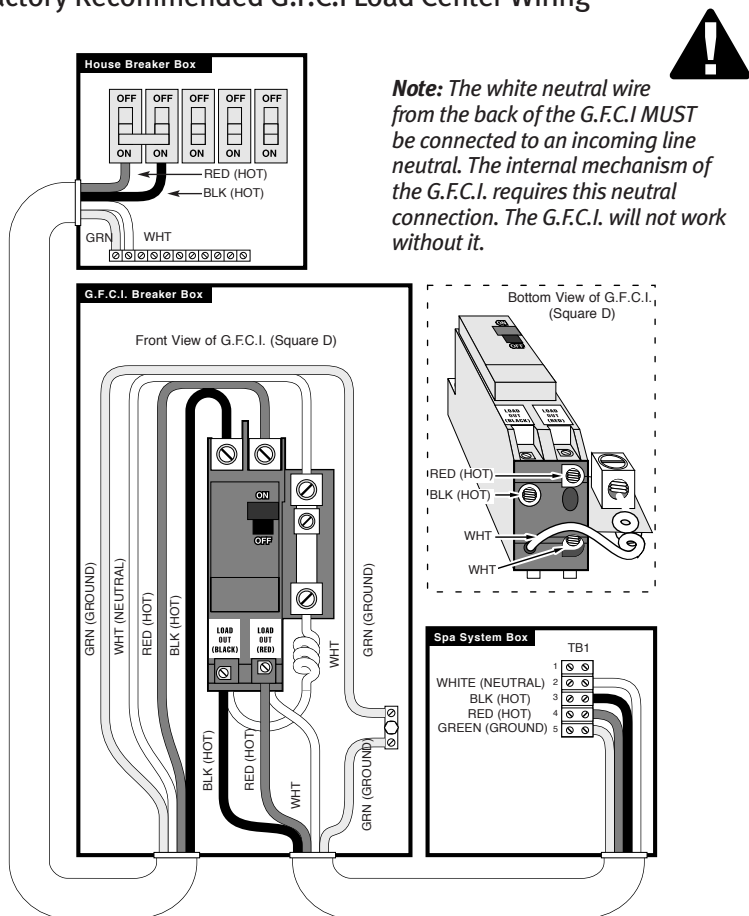

SET-UP & DELIVERY GUIDELINES

Getting Ready For Delivery & Set-up Of Your New Spa

- Normal Delivery consists of 2 men bringing the spa to a concrete slab or deck (not higher than ground level) Our insurance prevents them from lifting the spa higher than just stated. Please do not ask them to do otherwise.
- If we attempt to deliver the spa and discover that a crane is necessary, or that the yard of deck is not fully prepared, there will be a charge for the second or subsequent deliveries. Crane charges are the responsibility of the customer.
- The time required to set up your spa varies due to the complexity of each set up. However 1 to 1 1/2 hours is the normal time required.
- It is impossible for us to guarantee an exact arrival time - all deliveries and set up times are approximate.
- **Remember it is the customer's responsibility for the electrical line power installation, G.F.C.I., and electrical connection.** We cannot wire your spa for you.
- Please read your invoice carefully. You should not expect anything not written on your invoice.
- Should you have problems with your spa, and need service attention, please call our office at 800-951-6224, and ask for the retail department. As outlined in your warranty, the customer understands that the initial 90 days from delivery date, there will be a \$45.00 trip charge for service calls, but no charge for parts and labor. Failure to pay this fee will result in the immediate termination of your warranty. Dynasty Spas warranties are non-transferable.



Dynasty Spas, 100 Dynasty Way, Athens, TN 37303
www.dynastyspas.com

All Information In This Manual is Subject to Change Without Notice